


# E-SERIES RECOGNIZED

Constant Voltage Electronic  
 Phase-Dimmable LED Driver

## Specification Sheet

The **E-SERIES RECOGNIZED** is an electronic Class 2 dimmable LED driver with an extremely compact low-profile aluminum case, making it the perfect choice for under-cabinet lighting, kick/cove lighting, mirror lighting, and multiple other residential and commercial lighting applications. The driver features auto reset, over current and short circuit protection, as well as an efficiency of over 90% resulting in low operating case temperature. The product line is phase-dimmable down to 1% with leading edge TRIAC dimmers.



- Installation:** Wire leads
- Driver Types:** Class 2, Single Channel
- Dimming:** Phase-dimmable down to 1% with leading edge TRIAC dimmer
- Input Voltage:** 120VAC, 50/60Hz
- Output Voltage:** 12VDC or 24VDC
- Environmental:** Wet location
- Listing:** UL Recognized
- Certifications:** UL 8750, CSA C22.2 No. 250 13-14

### Component Signage

- Listing Certification:** UL 879 | CSA C22.2 No. 207-M89
- Warranty:** 5 year


E-SERIES is also available in:

- E-SERIES UL LISTED
- EZJ-Box
- JB-SERIES

Please refer to [magnitudeinc.com](http://magnitudeinc.com) for more information.

### ORDERING GUIDE

Type	Max Power	Listing	Output
<b>E-SERIES</b>	20 – 20W	R – UL Recognized Enclosure	12DC – 12VDC
<b>RECOGNIZED</b>	40 – 40W		24DC – 24VDC
	60 – 60W		
	75 <sup>1</sup> – 75W		
	96 <sup>1</sup> – 96W		
	<sup>1</sup> 24VDC Only		

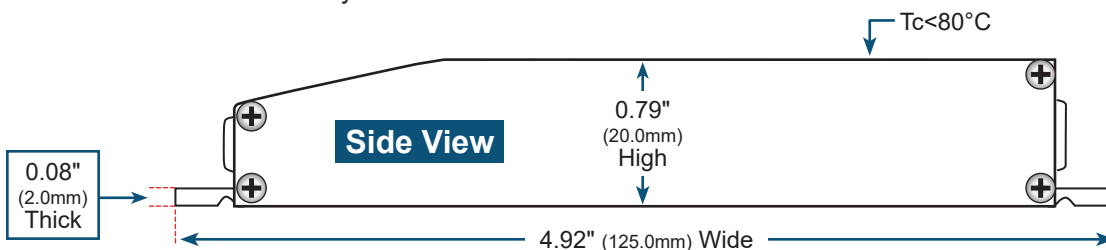


DIMENSIONS	
<b>Length</b>	4.92" (125.0mm)
<b>Width</b>	2.20" (56.0mm)
<b>Height</b>	0.79" (20.0mm)

**SPECIFICATIONS**


INPUT	20W	40W	60W	75W	96W
Input Voltage Range	120VAC ± 10%	120VAC ± 10%	120VAC ± 10%	120VAC ± 10%	120VAC ± 10%
Input Frequency	50 / 60Hz	50 / 60Hz	50 / 60Hz	50 / 60Hz	50 / 60Hz
Input Current (12VDC)	0.20A@120VAC	0.41A@120VAC	0.61A@120VAC	0.72A@120VAC	0.85A@120VAC
Input Current (24VDC)	0.20A@120VAC	0.41A@120VAC	0.61A@120VAC	0.72A@120VAC	0.85A@120VAC
Efficiency	> 90% (12VDC) > 90% (24VDC)	> 90% (12VDC) > 90% (24VDC)	> 90% (12VDC) > 90% (24VDC)	> 90%	> 90%
Power Factor	0.95	0.95	0.95	0.95	0.95
OUTPUT					
Max Load	20W	40W	60W	75W	96W
Output Voltage @ Max Load	12.0 VDC 24.0 VDC	12.0 VDC 24.0 VDC	12.0 VDC 24.0 VDC	24.0 VDC	24.0 VDC
Output Current @ Max Load	1.7A (12VDC) 0.90A (24VDC)	3.50A (12 VDC) 1.75A (24VDC)	5.00A (12VDC) 2.63A (24VDC)	3.3A	4.16A
ENVIRONMENTAL					
Max. Ambient Temp.	-30°C - +40°C (-22°F - 104°F)				
DIMMING					
Min. Dimming Level	1%	1%	1%	1%	1%
PROTECTION					
Circuit Breaker	Short circuit & over-voltage auto-reset				
MECHANICAL HOUSING					
Primary Leads	18AWG	18AWG	18AWG	18AWG	18AWG
Secondary Leads	14AWG	14AWG	14AWG	14AWG	14AWG
Length	4.92" (125.0mm)	4.92" (125.0mm)	4.92" (125.0mm)	4.92" (125.0mm)	4.92" (125.0mm)
Width	2.20" (56.0mm)	2.20" (56.0mm)	2.20" (56.0mm)	2.20" (56.0mm)	2.20" (56.0mm)
Height	0.79" (20.0mm)	0.79" (20.0mm)	0.79" (20.0mm)	0.79" (20.0mm)	0.79" (20.0mm)
Weight	9 oz. (255g)	9 oz. (255g)	9 oz. (255g)	9 oz. (255g)	9 oz. (255g)
Housing Material	Anodized Aluminum	Anodized Aluminum	Anodized Aluminum	Anodized Aluminum	Anodized Aluminum
Housing Color	Blue	Blue	Blue	Blue	Blue
Junction Box	No	No	No	No	No
Mounting	One hole flange mount and one half-hole flange mount.				
APPROVAL MARKINGS					
Certifications/Approval Signs	UL8750 Class 2	UL8750 Class 2	UL8750 Class 2	UL8750 Class 2	UL8750 Class 2

MECHANICAL DIAGRAMS

TOP VIEW

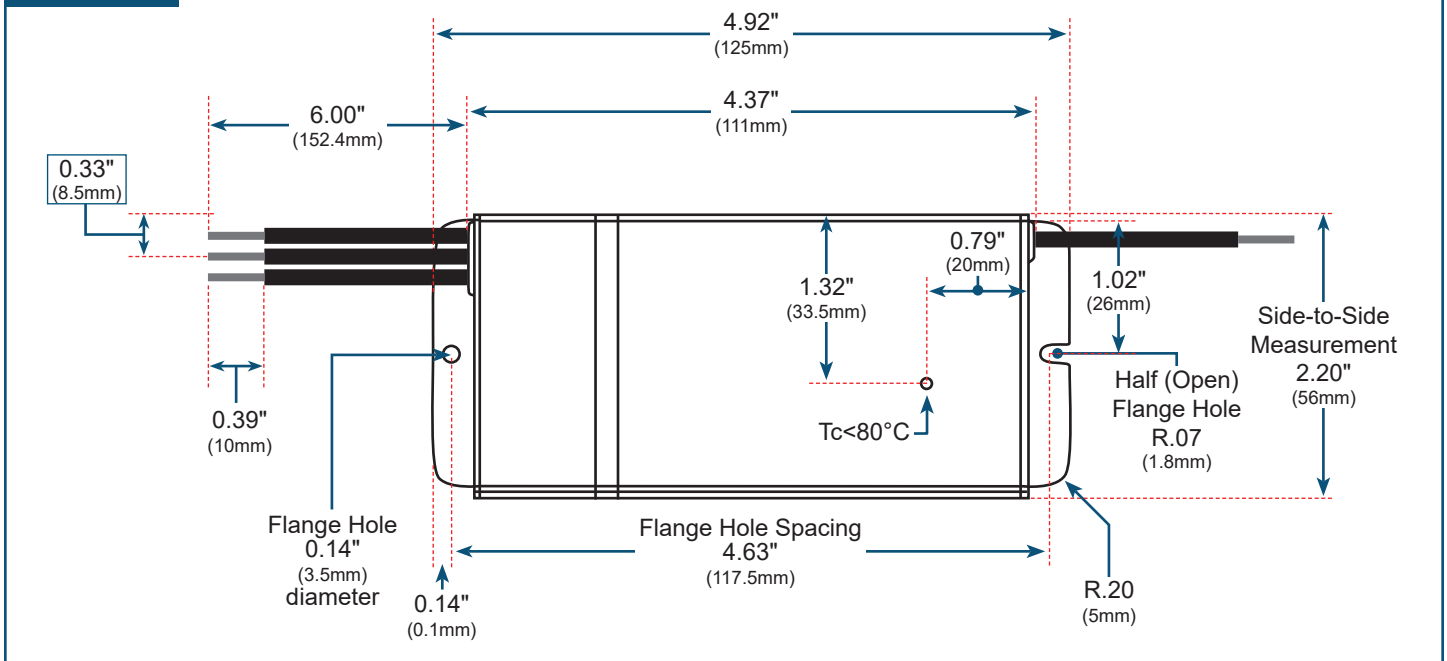


SIDE VIEW

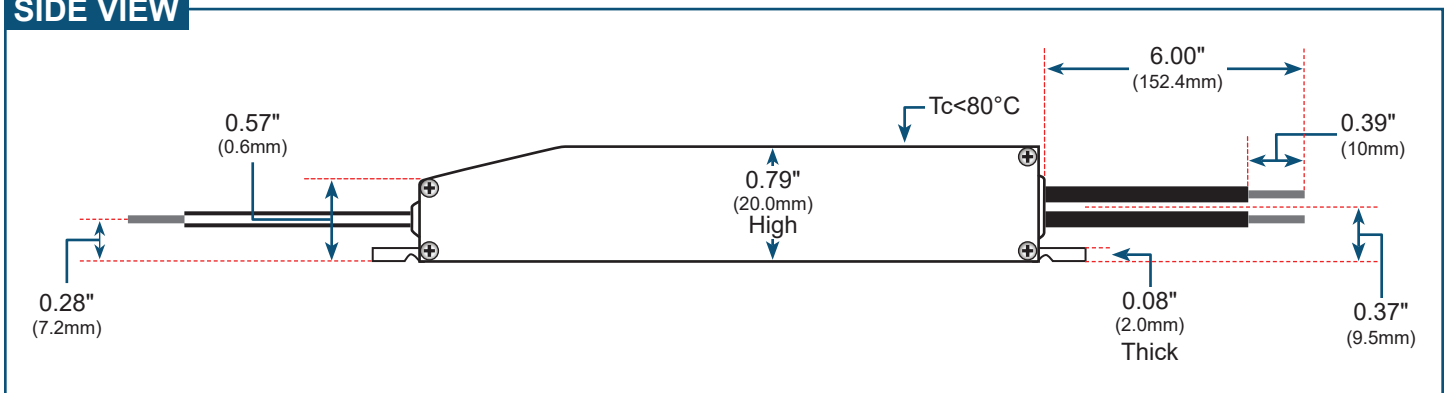


↓ **LOAD REGULATION (20 & 40W)** ↓

**20W (12VDC)**

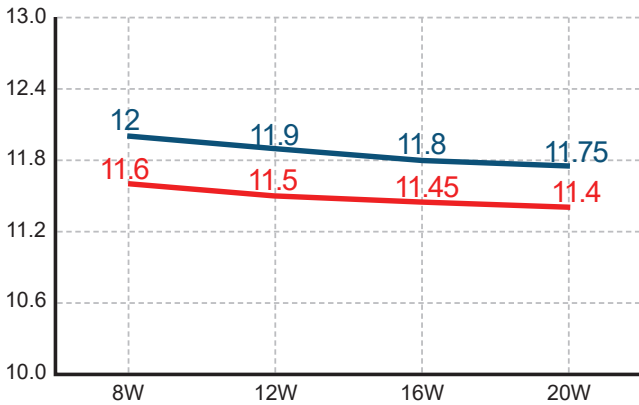


— Output Voltage vs. Load  
 — Output Voltage with a typical TRIAC Dimmer (on Max)

**20W (24VDC)**

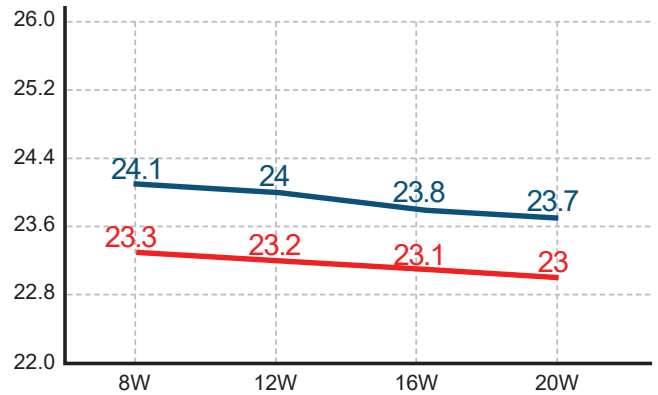


— Output Voltage vs. Load  
 — Output Voltage with a typical TRIAC Dimmer (on Max)

**40W (12VDC)**

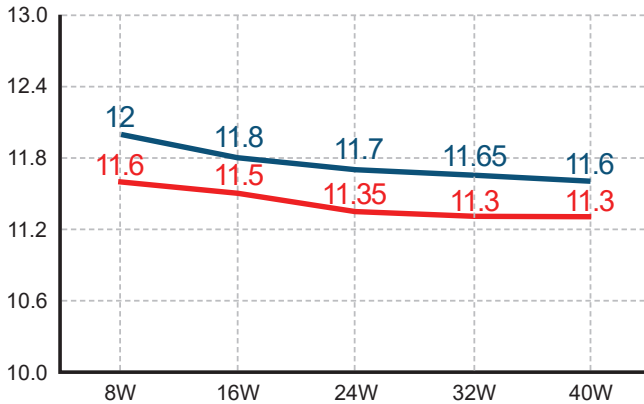

— Output Voltage vs. Load  
 — Output Voltage with a typical TRIAC Dimmer (on Max)


**40W (24VDC)**

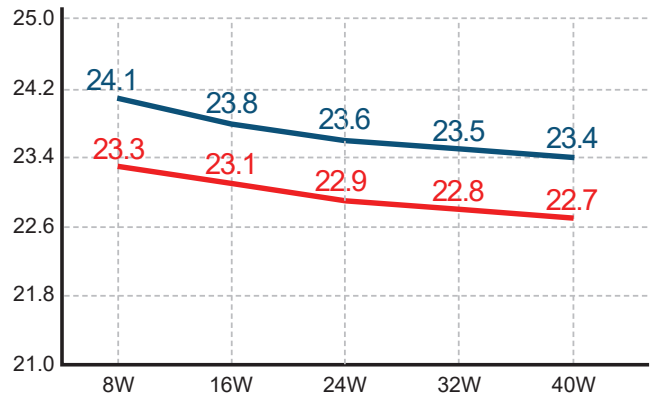

— Output Voltage vs. Load  
 — Output Voltage with a typical TRIAC Dimmer (on Max)


### LOAD REGULATION (60, 75 & 96W)

#### 60W (12VDC)

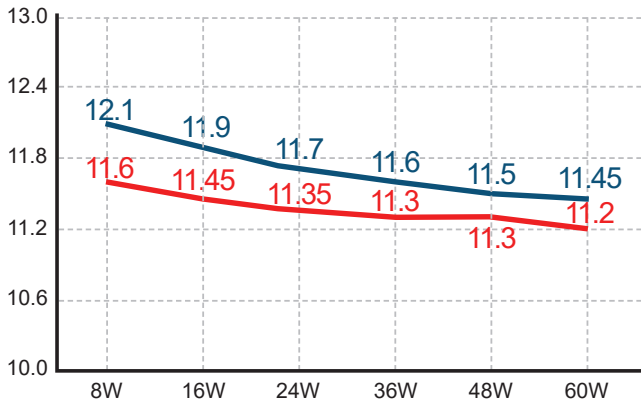


— Output Voltage vs. Load  
— Output Voltage with a typical TRIAC Dimmer (on Max)

#### 60W (24VDC)

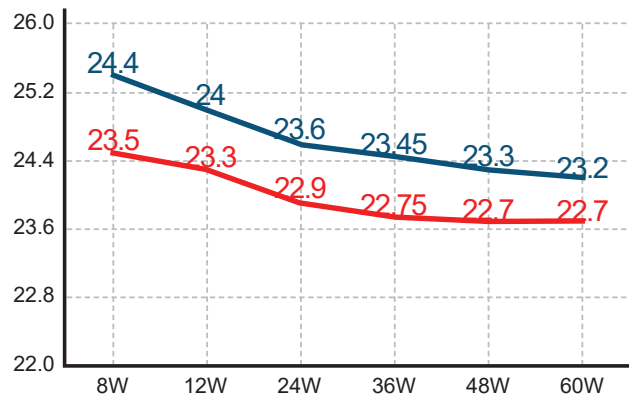


— Output Voltage vs. Load  
— Output Voltage with a typical TRIAC Dimmer (on Max)

#### 75W (24VDC)

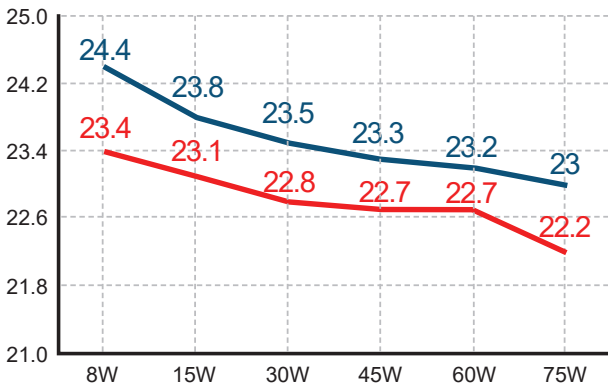

— Output Voltage vs. Load  
— Output Voltage with a typical TRIAC Dimmer (on Max)


#### 96W (24VDC)

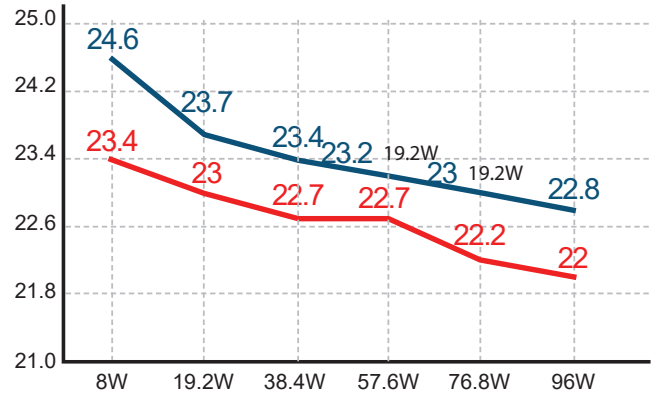

— Output Voltage vs. Load  
— Output Voltage with a typical TRIAC Dimmer (on Max)


↓ **WIRING DIAGRAMS** ↓

**12VDC OUTPUT**

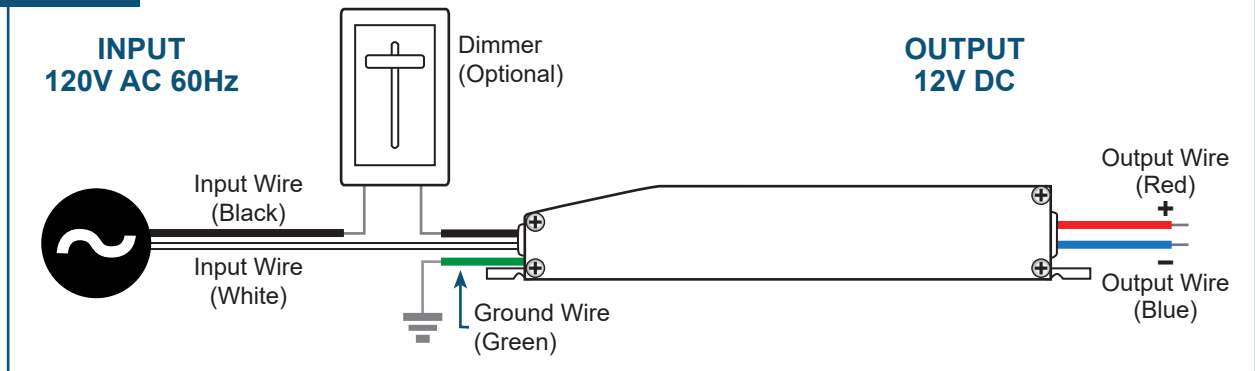

For smooth dimming, 8W minimum load is required.

**24VDC OUTPUT**

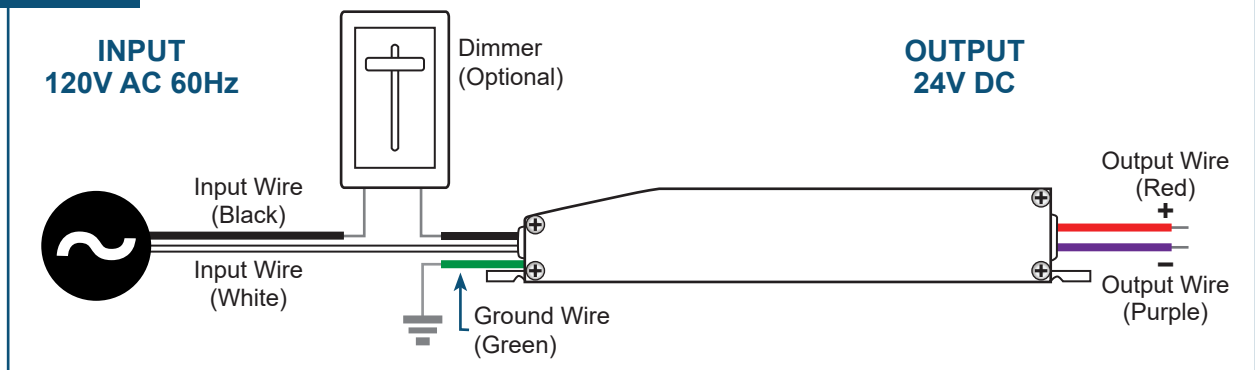

For smooth dimming, 8W minimum load is required.